




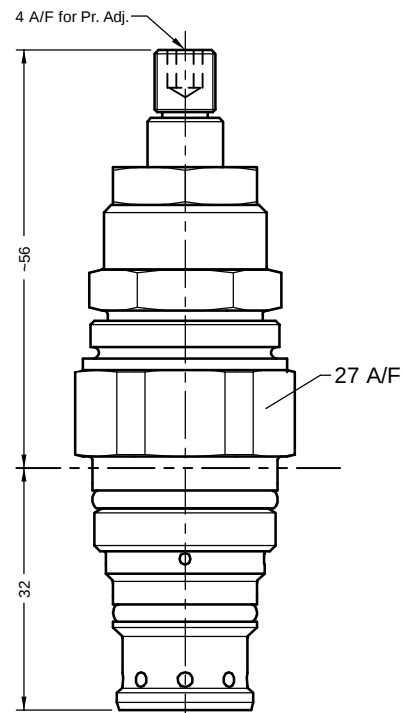

Ref. No.D 23100 B
Release : 12 / 2025
ENGINEERING - 1 of 2

Two options for pressure adjustments,

- With set screw and lock nut.
- With hand knob and lock nut.

[illegible]



Technical specifications

Construction	Pilot operated spool type.
Mounting / Standard	Threaded Cartridge (Factory standard)
Mounting position	Optional.
Flow direction	From P to A.
Maximum operating pressure.....	For port P, A, B 315 bar For port Y 60 bar
Hydraulic medium	Mineral oil.
Viscosity range	10 cSt to 380 cSt
Fluid temperature range	-20°C to +80°C
Fluid cleanliness requirement	ISO 4406 20/18/15 or better.
Nominal flow handling capacity	30 lpm.
Mass (approx)	0.2 kg.

Ordering code

