

WIRE ROPE SLINGS SINGLE PART



SPL-1




SPL-2



SPL-5




SPL-7




SPL-8

Loop Type Single Part Slings						
Max.Safe Working Load in Tons for 6x 19.6 X 36 Construction						
Rope	Fibre Core			Steel Core		
Dia.(mm)	Verticle	Basket	Choker	Vertical	Basket	Choker
6	0.4	0.8	0.3	0.5	1.0	0.4
8	0.8	1.5	0.6	0.8	1.7	0.7
9	1.0	2.0	0.8	1.1	2.1	0.8
10	1.2	2.4	1.0	1.3	2.6	1.1
12	1.8	3.5	1.4	1.9	3.8	1.5
13	2.1	4.1	1.6	2.2	4.4	1.8
14	2.4	4.8	1.9	2.6	5.2	2.1
16	3.1	6.2	2.5	3.4	6.7	2.7
18	4.0	7.9	3.2	4.3	8.5	3.4
19	4.4	8.8	3.5	4.8	9.5	3.8
20	4.9	9.7	3.9	5.3	10.5	4.2
22	5.9	11.8	4.7	6.4	12.7	5.1
24	7.0	14.0	5.6	7.2	14.4	5.8
25	7.5	15.0	6.0	7.6	15.2	6.1
26	8.1	16.1	6.4	8.7	17.4	6.9
28	9.3	18.7	7.5	10.1	20.1	8.1
32	12.2	24.4	9.8	13.2	26.3	10.5
35	14.4	28.8	11.5	15.7	31.5	12.6
38	17.6	35.2	14.1	18.6	37.1	14.8
40	18.4	36.9	14.8	20.6	41.1	16.5
44	23.1	46.1	18.4	24.9	49.8	19.9
50	27.4	54.8	21.9	34.8	69.5	27.8
56	37.0	74.0	29.6	40.3	80.7	32.3
64	48.0	96.0	38.4	52.7	105.3	42.1
70	55.0	110.0	44.0	65.0	130.0	52.0

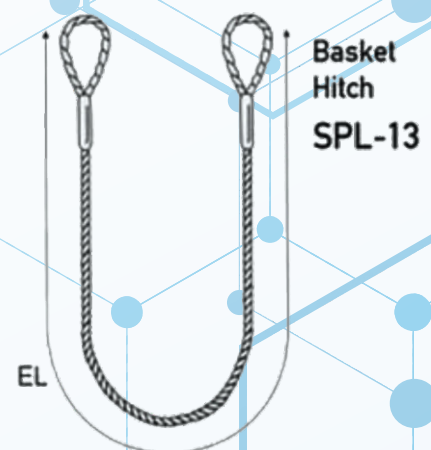

Basket Hitch
SPL-13

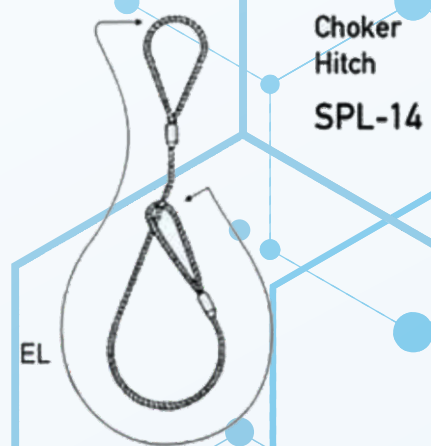

Choker Hitch
SPL-14

FACTOR OF SAFETY 5:1 TENSILE STRENGTH: 1770/1960 N/mm²

Note: The capacity indicated in the above table, for basket hitch and choker hitch is for guidance only, vertical column is the actual load the slings can be tested and certified in other words safe working load is applicable for vertical lift only.